



*Open and unfold
at the touch
of a button!*

Automatic Super Simplex Folding Stairway

Precision Ladders' **NEW** patent-pending folding stairway can be configured for ceiling heights up to 16', and a total level-to-level climbing height of 24'. This new generation of stairway shares the following characteristics with the original Super Simplex

Disappearing Stairway:

- Meets A.N.S.I. A14.9 for "Commercial" use
- 500 lbs load rating
- Actual shear of rivets tested to 1175 lbs
- Steel frame
- Extruded aluminum treads and siderails
- 5 3/16" x 18" clear tread area
- Can be used for either attic or roof access

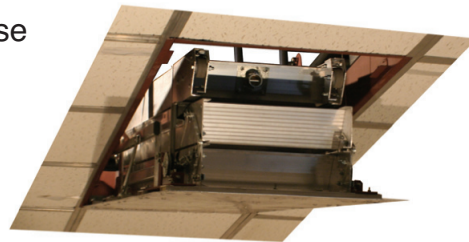


**Automatic
Super Simplex
Folding Stairway**



Features unique to the Automatic Super Simplex:

- Can be operated from above or below
- Operated via wireless wall-mounted keypad
- Powerful 24v DC motor provides ultra-quiet operation, along with variable speed smooth start and smooth stop
- Motor has an enclosed gear case which provides continuous lubrication and protection for longer life and smoother operation
- A 6 foot long 120 volt 15 amp power cord makes connecting to a power source easy
- Evercharge stand-by power system will allow stair to be operated for up to 10 full cycles within a 24 hour period in the event of a power outage.

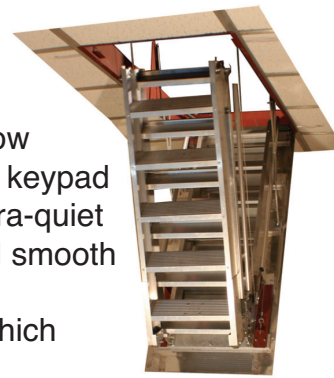

MADE IN THE
USA SINCE 1942



Phone: 1-800-609-2917
Fax: 1-888-828-6021

Email: info@accessdoorsandpanels.com
Website: www.accessdoorsandpanels.com
Address: PO Box 66738 #76520, Saint Louis

Precision Ladders, LLC

www.PrecisionLadders.com




Automatic Super Simplex Folding Stairway

Precision Ladders, LLC

www.PrecisionLadders.com

Details

- ❖ Custom made for ceiling heights from 8' 0" to 13' 6". *
 - ❖ 2 types of frames are available:
 - Box Frame (90° both ends) must be used when 'D' dimension is less than 13"
 - Angle Frame (63° on hinge end, 90° on the other) is standard when 'D' is 13" or greater. Angle frame has built-in treads on the hinge end of the frame to allow a continuous 63° climb. Maximum depth for angle frame is 8'. Box frame may be used if space won't allow the longer opening at upper level. Maximum depth of box frame is 5'.
 - ❖ Choose either an aluminum door or an insulated steel door.
 - ❖ When used for roof access (roof hatch factory-mounted to frame), a minimum 'D' of 30" is required.
- * Ceiling heights of 13' 7" to 16' 0" are available. These stairs will still automatically open the door panel, but must be manually unfolded.

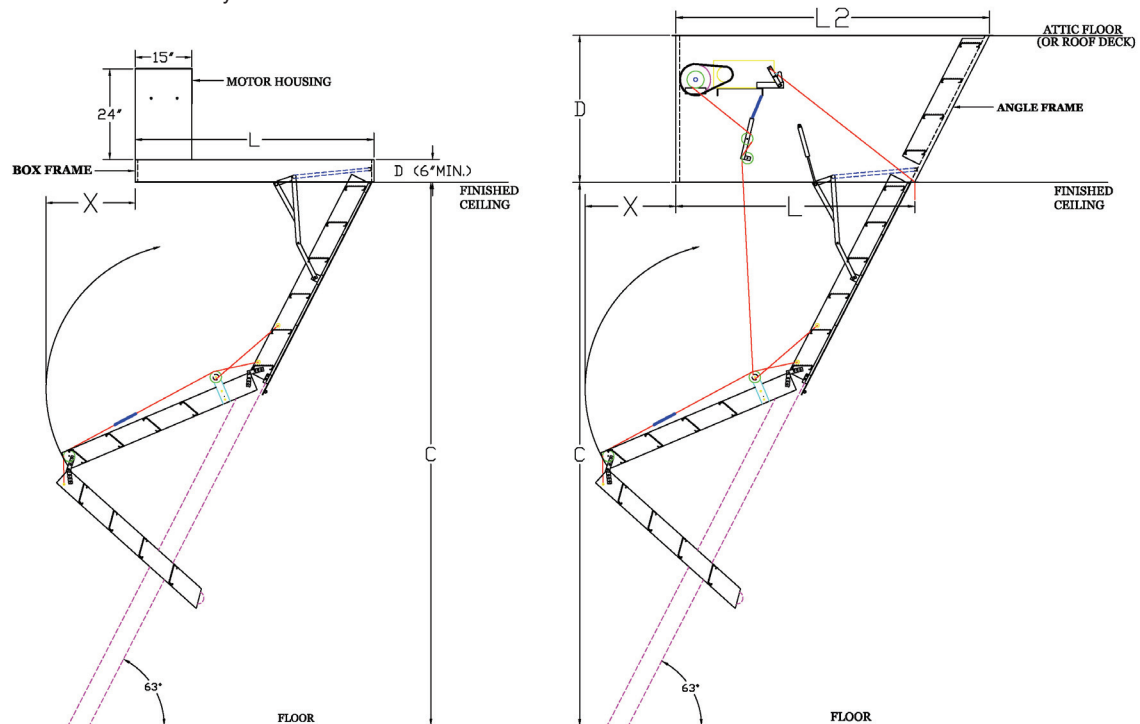

Required Information

1. Floor to ceiling height ('C')
2. Distance from finished ceiling to floor above ('D').
If 'D' is less than 13", only a box frame can be used and only Chart 1 is needed. If 'D' is 13" or more and an angle frame is used, Chart 2 is needed to determine rough opening length at upper level.

CHART 1

C (CEILING HEIGHT)	X (CLEARANCE)	L	Rough Opening in ceiling	*Rough Opening in floor above
8' 0" to 9' 9"	42	53 1/4"	30" x 54"	30" x L2 + 3/4"
9' 10" to 10' 11"	46	63 1/4"	30" x 64"	30" x L2 + 3/4"
11' 0" to 12' 0"	50	63 1/4"	30" x 64"	30" x L2 + 3/4"
12' 1" to 13' 6"	60	71 1/4"	30" x 72"	30" x 72"
13' 7" to 16' 0"	Available in auto-open, manual unfold only - consult factory			

* If box frame is used, this dimension is the same as the ceiling opening.

CHART 2

D	L2	D	L2
13"	L + 6 5/8"	31"	L + 15 13/16"
14"	L + 7 1/8"	32"	L + 16 5/16"
15"	L + 7 5/8"	33"	L + 16 13/16"
16"	L + 8 1/8"	34"	L + 17 5/16"
17"	L + 8 11/16"	35"	L + 17 13/16"
18"	L + 9 3/16"	36"	L + 18 5/16"
19"	L + 9 11/16"	37"	L + 18 7/8"
20"	L + 10 3/16"	38"	L + 19 3/8"
21"	L + 10 11/16"	39"	L + 19 7/8"
22"	L + 11 3/16"	40"	L + 20 3/8"
23"	L + 11 3/4"	41"	L + 20 7/8"
24"	L + 12 1/4"	42"	L + 21 3/8"
25"	L + 12 3/4"	43"	L + 21 15/16"
26"	L + 13 1/4"	44"	L + 22 7/16"
27"	L + 13 3/4"	45"	L + 22 15/16"
28"	L + 14 1/4"	46"	L + 23 7/16"
29"	L + 14 3/4"	47"	L + 23 15/16"
30"	L + 15 5/16"	48"	L + 24 7/16"

Phone: 1-800-609-2917
Fax: 1-888-828-6021

Email: info@accessdoorsandpanels.com
Website: www.accessdoorsandpanels.com
Address: PO Box 66738 #76520, Saint Louis