



TECHNICAL DATA SHEET

www.AccessDoorsAndPanels.com

APPLICATION

Inverted "Y" Blades with Security Grille Meets up to 350 ft lb Impact Rating for Severe Windstorm Rating. Zinc-plated CRS base with Powder Coat Finish Provides Superior Corrosion-Resistance for Exterior Applications

SPECIFICATIONS

MATERIAL: 18 gauge zinc-plated CRS frame and blades; 12 gauge zinc-plated CRS security grille. Minimum size 6" X 6", Maximum size 24" W x 64" H.

CONSTRUCTION: Louver: 2 rows of Inverted, split "Y" blades with 1" blade spacing are attached to welded frame with by interlocking construction. Non-vision design. Security Frame: Security grille with 13/16" square openings is welded to interior and exterior of louver. Thru-bolted to door.


DOOR: 1-3/4". Door cutout = order size.

FASTENERS: #8-32 Phillips head thru-bolts with blank head one side.

FREE FLOW AREA: 40% free area.

SKU: **BA-DLHY-B**

HURRICANE RATED Y-BLADE LOUVER

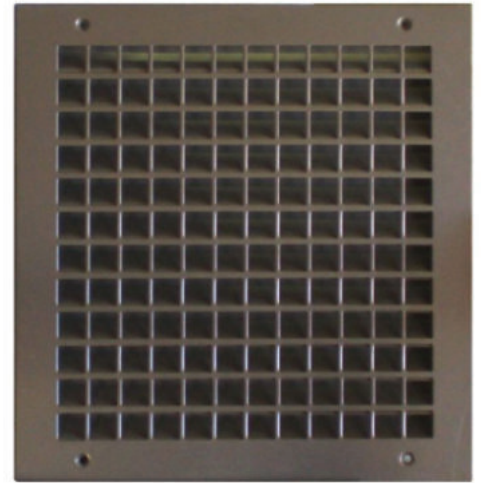


DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING](#) <<

LISTINGS & RATINGS:

BA-DLHY-B Listed Severe Windstorm Approved Louver

Tested in Accordance with:
ASTM E330, ASTM E1996, ANSI A250.13
TAS 203, 201, 202, ASTM E 1886
Impact (ft lb) 350
DP Rating (PSF) 60
Florida Building Code Approval File # FL13341

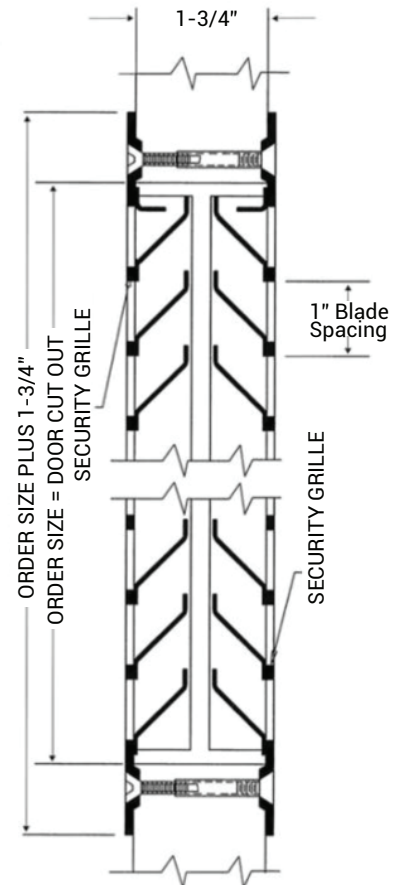

For a complete list of options visit
www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes & Options Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			



TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com