

# SUBMITTAL/TECHNICAL DATA SHEET

## INVISAGRILLE

### APPLICATION


- Designed for 1/2" and 5/8" thick dry wall
- Suitable for both wall and ceiling installation
- Screws on to the face of your drywall
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour
- The inserts comes primed white and ready for your paint colour

### FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser
- 4 rare earth magnets (0.250" diameter x 0.060" thick)
- Easy installation, primed and ready to paint
- 20 degree angled slots for directional venting and to hide a fan
- Fire Rated, non-flammable
- Impact Resistant
- Moisture and Water resistant, Mold resistant
- Eco-Friendly Manufacturing and Non-Hazardous

### SPECIFICATIONS

- Over 29.6 square inches (173.5 square centimeters) of open area
- Slot Size: 7.645" x 0.32" (194.2mm x 8.12mm)
- 11 angled horizontal slots
- Overall dimensions are 12.125" x 12.125" x 0.5" (307.9mm x 307.9mm x 12mm).
- Product weight is 1.7 pounds (0.78 kilograms)

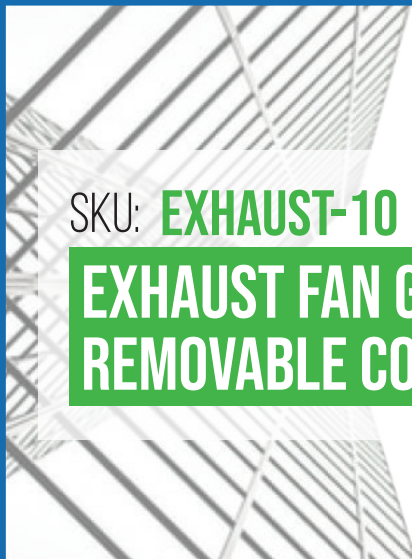



SKU: **EXHAUST-10**

**EXHAUST FAN GRILLE  
REMOVABLE COVER**



### DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

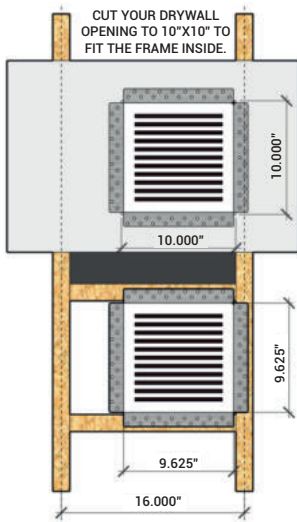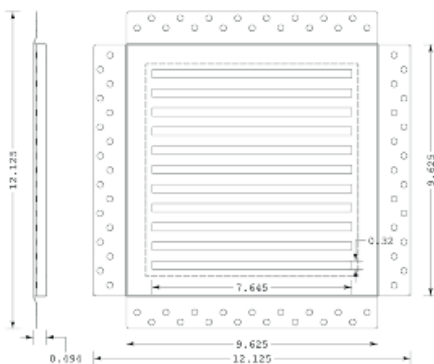

A premium flush mount exhaust fan cover for a 10" x 10" drywall opening. This cover can also be used as a cold air return, and yields a 8.125"x8.125" accessible area.

(NOTE: your exhaust fan and/or motor needs to fit through this area).

#### MATERIAL SPECIFICATIONS:



- |                                       |  |
|---------------------------------------|--|
| Raw Material                          | - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite |
| Density                               | - 0.95 g/cm <sup>3</sup>   |
| Water Content                         | - 12%  |
| Chloride Ion Content                  | - 0%   |
| Formaldehyde Release                  | - 0%   |
| Asbestos Content                      | - 0%   |
| Fire resistance                       | - Incombustibility A1 Class (GB 8624-2006/EN13501-1)                 |
| Water Absorption                      | - 27%  |
| Resistant Bending Strength            | - 8 MPa  |
| Impact Resistance                     | - 1.5 Jim  |
| Nail-Withdrawal strength              | - 16 N/mm  |
| Water Permeability                    | - No water vapour after 24 hours' test                               |
| Refractoriness (Pyrometric cone Test) | - 4H   |
| pH Value                              | - 6.7(8.0)   |
| Thermal conductivity                  | - 0.2 W/(mK)   |
| Moisture Movement                     | - 0.25 %   |
| Heat Shrinkage Rate                   | - 0.05   |
| Freeze Thaw                           | - No distortion after 25 repeated cycles of freezing and thawing.    |

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

### PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)