

SUBMITTAL/TECHNICAL DATA SHEET

INVISAGRILLE

APPLICATION


- Designed for 1/2" and 5/8" thick dry wall
- Suitable for both wall and ceiling installation
- Screws on to the face of your drywall
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour
- The inserts comes primed white and ready for your paint colour

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser
- 4 rare earth magnets (0.250" diameter x 0.060" thick)
- Easy installation, primed and ready to paint
- 20 degree angled slots for directional venting and to hide a fan
- Fire Rated, non-flammable
- Impact Resistant
- Moisture and Water resistant, Mold resistant
- Eco-Friendly Manufacturing and Non-Hazardous

SPECIFICATIONS

- Over 14.36 square inches (92.64 square centimeters) of open area
- Slot Size: 5.613" x 0.32" (142.5mm x 8.12mm)
- 8 angled horizontal slots
- Overall dimensions are 10.125" x 10.125" x 0.5" (257.17mm x 257.17mm x 12mm).
- Product weight is 1.2 pounds (0.54 kilograms)

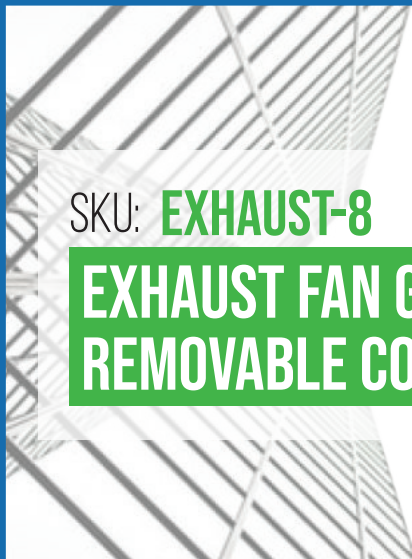



SKU: **EXHAUST-8**

**EXHAUST FAN GRILLE
REMOVABLE COVER**



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

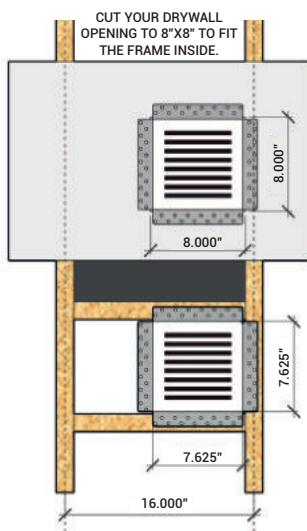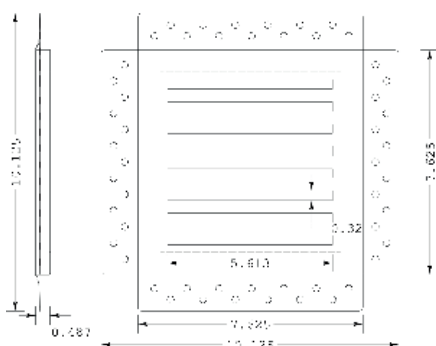

A premium flush mount exhaust fan cover for a 8"x8" drywall opening. This cover can also be used as a cold air return, and yields a 6.125"x6.125" accessible area.

(NOTE: your exhaust fan and/or motor needs to fit through this area).

MATERIAL SPECIFICATIONS:



| | |
|---------------------------------------|--|
| Raw Material | - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite |
| Density | - 0.95 g/cm ³ |
| Water Content | - 12% |
| Chloride Ion Content | - 0% |
| Formaldehyde Release | - 0% |
| Asbestos Content | - 0% |
| Fire resistance | - Incombustibility A1 Class (GB 8624-2006/EN13501-1) |
| Water Absorption | - 27% |
| Resistant Bending Strength | - 8 MPa |
| Impact Resistance | - 1.5 Jim |
| Nail-Withdrawal strength | - 16 N/mm |
| Water Permeability | - No water vapour after 24 hours' test |
| Refractoriness (Pyrometric cone Test) | - 4H |
| pH Value | - 6.7(8.0) |
| Thermal conductivity | - 0.2 W/(mK) |
| Moisture Movement | - 0.25 % |
| Heat Shrinkage Rate | - 0.05 |
| Freeze Thaw | - No distortion after 25 repeated cycles of freezing and thawing. |

For a complete list of options visit www.AccessDoorsAndPanels.com

PROJECT DATA

Custom Sizes Available - Fast!

| PROJECT NAME : | QTY | W | H | OPTIONS |
|------------------------|--|---|---|---------|
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | SUBMITTAL APPROVAL : (signature or stamp) | | | |
| TAGGING INSTRUCTIONS : | | | | |

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com