

DESCRIPTIONS

The Handi-Access plastic door is suitable for all surfaces and can be installed easily by applying glue or caulking adhesive to the back of the frame and pressing into place.

SPECIFICATION

CONSTRUCTION:

- Door and frame shall be constructed of 1/8" high impact styrene plastic.
- Door panel is both hinged and removable for unobstructed access.
- Door panel is held closed by a snap friction catch and easily opens without the use of special tools.
- Door is easily installed by applying caulking adhesive to the back of the frame and pressing into place.
- Finish is white, with attractive lightly textured exposed surfaces ready for painting or wallpapering.

For a complete list of options visit www.AccessDoorsAndPanels.com





To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET






■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE		SHIP WT.			
W x H (IN.)	В	С	D	(LBS.)	
8 x 8	1	7 3/4	8	0.6	
12 x 12	1 1/4	11 5/8	12	1.2	
14 x 14	1 3/8	17 1/4	17 1/2	2.5	
18 x 18	1 1/4	13 3/4	14	1.6	
22 x 22	1 1/2	21 5/8	22	3.4	
14 x 29	1 5/8	28 1/8 x 13 13/16	29 3/8 x 14 1/8	3.8	

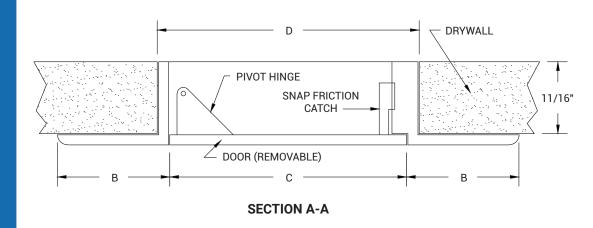

■ PROJECT DATA

Custom Sizes Available - Fast!

	PROJECT NAME :	QTY	W	Н	OPTIONS		
	ARCHITECT:						
2	DEALER:						
	CONTRACTOR:						
	LOCATION:	SPECIAL INSTRUCTIONS:					
	DATE:	SUBMITTAL APPROVAL : (signature or stamp)					
	TAGGING INSTRUCTIONS:						



TELEPHONE: 1-888-457-1275 FAX: 1-888-626-2907



PO BOX 66738 #76520, SAINT LOUIS, MO 63166-6738 USA



WEBSITE:

www.AccessDoorsAndPanels.com