

# SUBMITTAL/TECHNICAL DATA SHEET

## INVISAGRILLE

### DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 14"x8" opening. This cover fits into the drywall opening of 13.875"x11.5" and has a vented/slotted area of 12"x8.75". This item is taller to maximize air flow while fitting between 2 studs.

### APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installations.
- Not suitable for ceiling install (call for ceiling option).
- Combine with DMP14 for vent dampering and shut off.
- Rough-in's available for new builds and major renovations.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

### FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

### SPECIFICATIONS

- Over 47.4 square inches (305.8 square centimeters) of open area.
- Slot Size: 0.32" x 5.7" (8mm x 145mm).
- 26 angled horizontal slots.
- Slot Angle - 20 degrees-Overall dimensions are 16" x 13.625" x 0.5" (406mm x 346mm x 12mm).
- Product weight is 2.2 pounds (1 kilogram)

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

SKU: **IG-MAG-C14DMP**


**FLUSH REMOVABLE COLD AIR RETURN COVER**

WITH DAMPER



### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

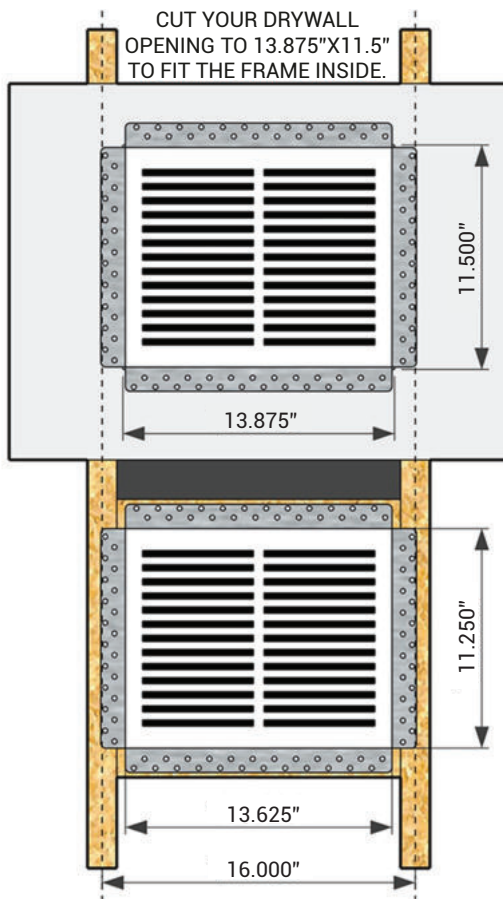


#### MATERIAL INFORMATION:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers.  
 Density: 1.0 <math>D \le 1.2 \text{ g/cm}^3</math>  
 Asbestos Content: 100% asbestos-free  
 Fire resistance: non-combustible  
 Water Absorption:  $\le 40\%$   
 Resistant Bending Strength:  $\le 10.5 \text{ MPa}$  dry  
 Moisture Movement: 0.25 %  
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

#### NOTES

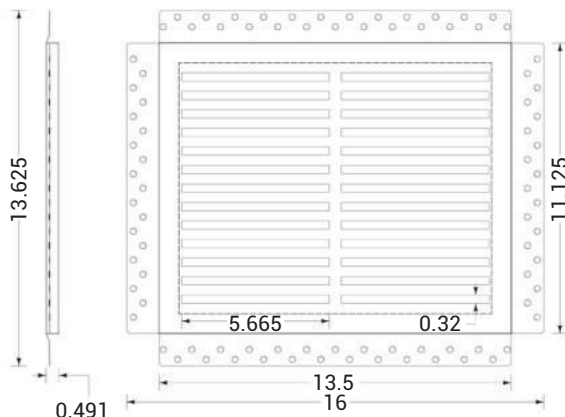

THIS MODEL INCLUDES A DAMPER



### PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907

PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)