

# SUBMITTAL/TECHNICAL DATA SHEET

## INVISAGRILLE

### DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 14"x6" opening. This cover fits into the drywall opening of 13.75"x8.5" and has a vented/slotted area of 12"x6"

### APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installation.
- Not suitable for ceiling install (call for ceiling option).
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

### FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Straight horizontal rectangular slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

### SPECIFICATIONS


- Over 32.63 square inches (210.5 square centimeters) of open area.
- Slot Size: 0.32" x 5.665" (8mm x 143mm).
- 18 straight horizontal slots.
- Overall dimensions are 16" x 10.5" x 0.5" (406mm x 266mm x 12mm).
- Product weight is 1.54 pounds (0.69 kilogram)

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)





SKU: **IG-MAG-C14X6**

**FLUSH REMOVABLE  
COLD AIR RETURN COVER**

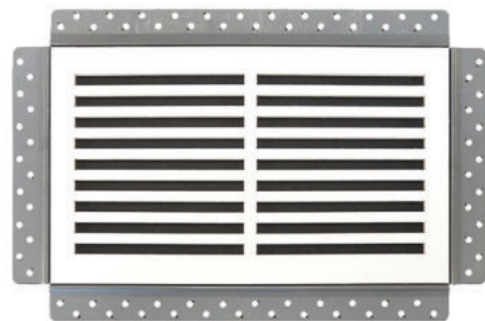

### DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

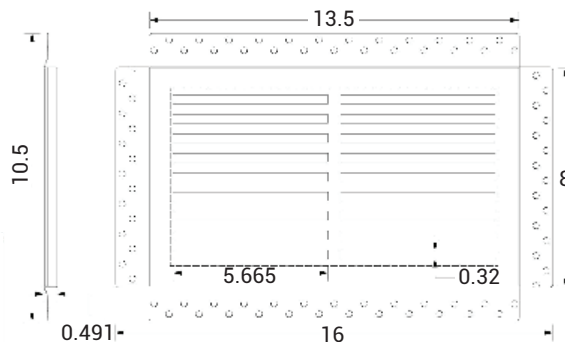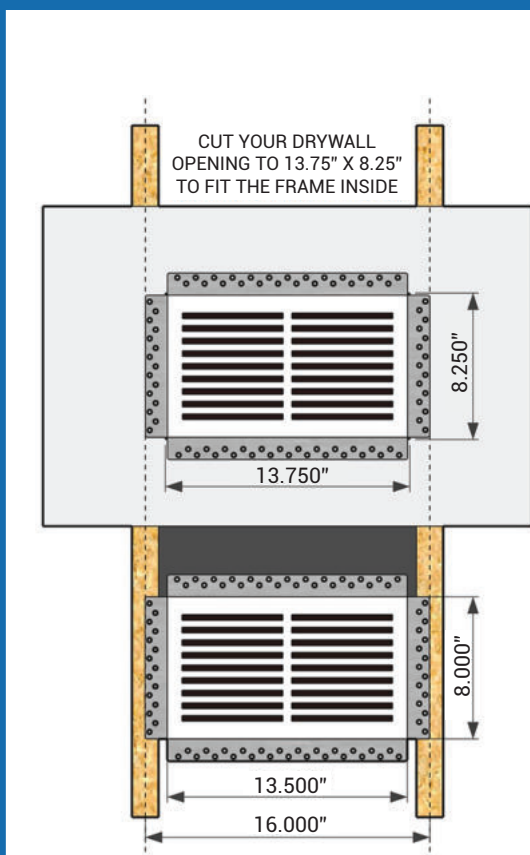

#### MATERIAL INFORMATION:

**Raw Material:** Cement, fibres, quartz sand, non-hazardous fillers.

**Density:** 1.0 <math>D \le 1.2 \text{ g/cm}^3</math>

**Asbestos Content:** 100% asbestos-free

**Fire resistance:** Non-combustible edge and adjustable diffuser.

**Water Absorption:**  $\le 40\%$

**Resistant Bending Strength:**  $\le 10.5 \text{ MPa dry}$


**Moisture Movement:** 0.25 %

**Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing.

### PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)