

# SUBMITTAL/TECHNICAL DATA SHEET

## INVISAGRILLE

### APPLICATION


- Designed for 1/2" and 5/8" thick dry wall
- Suitable for both wall and ceiling installation
- Screws on to the face of your drywall
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour
- The inserts comes primed white and ready for your paint colour

### FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser
- 4 rare earth magnets (0.250" diameter x 0.060" thick)
- Easy installation, primed and ready to paint
- 20 degree angled slots for directional venting and to hide a fan
- Fire Rated, non-flammable
- Impact Resistant
- Moisture and Water resistant, Mold resistant
- Eco-Friendly Manufacturing and Non-Hazardous

### SPECIFICATIONS

- Over 43.6 square inches (281.2 square centimeters) of open area
- Slot Size: 9.75" x 0.32" (247.6mm x 8.12mm)
- 14 angled horizontal slots
- Overall dimensions are 14.25" x 14.25" x 0.5" (361.9mm x 361.9mm x 12mm).
- Product weight is 2.2 pounds (1 kilograms)

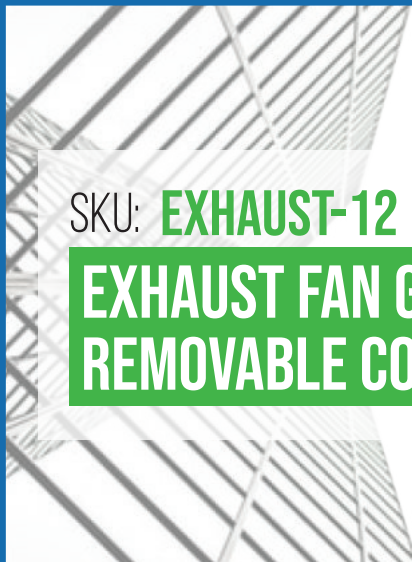


SKU: **EXHAUST-12**

**EXHAUST FAN GRILLE  
REMOVABLE COVER**



### DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING](#) <<

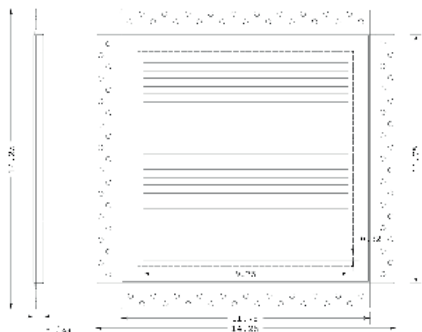


A premium flush mount exhaust fan cover for a 12" x 12" drywall opening. This cover can also be used as a cold air return, and yields a 10.25"x10.25" accessible area.

(NOTE: your exhaust fan and/or motor needs to fit through this area).

#### MATERIAL SPECIFICATIONS:


- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm<sup>3</sup>
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance - Incombustibility A1 Class (GB 8624-2006/EN13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 Jim
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7(8.0)
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

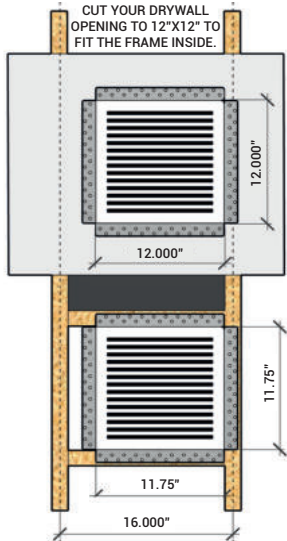

For a complete list of options visit [www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)

### PROJECT DATA

**Custom Sizes Available - Fast!**

Scan  or  Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:  
1-888-457-1275  
FAX:  
1-888-626-2907



PO BOX 66738 #76520,  
SAINT LOUIS, MO  
63166-6738  
USA



WEBSITE:  
[www.AccessDoorsAndPanels.com](http://www.AccessDoorsAndPanels.com)  
E-MAIL:  
[info@AccessDoorsAndPanels.com](mailto:info@AccessDoorsAndPanels.com)