

PW Series



Plastered Wall Access Doors

Doors are designed specifically to meet the needs of plaster construction. Door has 3/4" plaster ground for plaster finish.

Door and Frame are fabricated from 16 gage, galvannealed steel with a white prime coat finish.

Frame has 1/4" mounting holes to facilitate installation.

Concealed Pivoting Rod Hinge prevents distortion and closes door squarely.

Latch is screwdriver operated.

Finish is a white prime coat suitable for painting.

Guide Specification

Provide Elmdor® PW Series, Plastered Wall Access Doors (specify model number and options). Access door and frame shall be fabricated from 16 gage, galvannealed steel with a white prime coat finish. The door shall have a concealed pivoting rod hinge and a screwdriver operated latch. Finish shall be a white prime coat suitable for painting.







MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

☐ PW Plastered Wall Access Door

Suffix Options


-AKL Allen Key Latch

-CL Cylinder Lock (one per door) ☐-SS Stainless Steel Construction

(Type 304 No. 4 Satin Finish)

STANDARD AVAILABLE SIZESSpecial sizes available upon request.


Special sizes available upon request.			
WALL OPENING (minimum required)	LATCHES	WEIGHT	
8-1/4" x 8-1/4"	1	3.5 lbs.	
8-1/4" x 12-1/4"	1	5 lbs.	
10-1/4" x 10-1/4"	1	5.5 lbs.	
12-1/4" x 12-1/4"	1	6 lbs.	
12-1/4" x 16-1/4"	1	7.5 lbs.	
12-1/4" x 18-1/4"	1	8.5 lbs.	
12-1/4" x 24-1/4"	3	12 lbs.	
14-1/4" x 14-1/4"	2	7.5 lbs.	
16-1/4" x 16-1/4"	2	9.5 lbs.	
16-1/4" x 20-1/4"	2	12 lbs.	
18-1/4" x 18-1/4"	2	11 lbs.	
18-1/4" x 24-1/4"	3	17.5 lbs.	
20-1/4" x 24-1/4"	3	21 lbs.	
20-1/4" x 30-1/4"	3	22 lbs.	
24-1/4" x 24-1/4"	3	20 lbs.	
24-1/4" x 30-1/4"	3	23.5 lbs.	
24-1/4" x 36-1/4"	3	27 lbs.	
30-1/4" x 30-1/4"	3	30 lbs.	
36-1/4" x 36-1/4"	3	38 lbs.	
	WALL OPENING (minimum required) 8-1/4" x 8-1/4" 8-1/4" x 12-1/4" 10-1/4" x 10-1/4" 12-1/4" x 12-1/4" 12-1/4" x 16-1/4" 12-1/4" x 18-1/4" 12-1/4" x 24-1/4" 14-1/4" x 14-1/4" 16-1/4" x 16-1/4" 16-1/4" x 16-1/4" 18-1/4" x 18-1/4" 20-1/4" x 24-1/4" 20-1/4" x 24-1/4" 20-1/4" x 30-1/4" 24-1/4" x 30-1/4" 24-1/4" x 30-1/4" 30-1/4" x 30-1/4"	WALL OPENING (minimum required) 8-1/4" x 8-1/4" 10-1/4" x 10-1/4" 112-1/4" x 12-1/4" 112-1/4" x 16-1/4" 112-1/4" x 18-1/4" 112-1/4" x 24-1/4" 114-1/4" x 14-1/4" 116-1/4" x 20-1/4" 118-1/4" x 24-1/4" 119-1/4" x 30-1/4" 119-1/4" x 30-1/4	



FRONT VIEW

NOTES:

- 1. CONCEALED PIVOTING ROD HINGE
- 2. FRAME
- 3. MOUNTING HOLES
- 4. CERAMIC TILE OVER PLASTER
- 5. SCREWDRIVER OPERATED LATCH
- 6. DOOR
- 7. FINISH LINE, PLASTER OVER MASONRY
- 8. METAL LATH

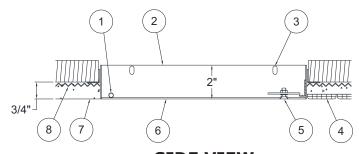

SIDE VIEW

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING		
Model Number & Options	Quantity	
Company	Date	
Contact	Title	
Approval for Manufacturing/Signature		

PW Revised: 8/04/16