

SUBMITTAL/TECHNICAL DATA SHEET

INVISAGRILLE

DESCRIPTION

Sleek and timeless, the Envisivent Removable Air Return Vent creates a modern touch with its fully detachable front, made easy by magnetic technology. This design innovation ensures a seamless appearance, free from the bulk of traditional plastic covers or the distraction of visible screws.

APPLICATION

- Designed to be installed with 1/2" or 5/8" thick drywall.
- Install anywhere on a wall where there are duct openings (if applicable)/or wall cavity both high (towards the ceiling) or low (towards the floor).


FEATURES

- Magnetic Removable Impact Resistant Triple Fibre Reinforced Cement Board Vent Cover
- Primed vent cover ready to accept paint
- 24 gauge galvanized satin coat steel frame
- 4 magnetic tabs on Vent Cover for easy removal
- Made of non-flammable materials
- Moisture, mold, and water resistant

SPECIFICATIONS

- Removable Flush Mount Air Return Vent Cover for duct opening size 30" x 14" (if applicable)/or wall cavity
- Fits into a drywall opening of 32" x 16"
- Overall Dimensions: 18.375" x 34.375" x 0.5"
- Vent Cover Dimensions: 15.875" x 31.875"
- Vented Opening Dimensions: 30" x 14"
- Each slot size is 6.406" x 0.32"
- 80 straight horizontal vent slots
- Over 155 square inches (999.99 square cm) of open vent area

For a complete list of options visit www.AccessDoorsAndPanels.com

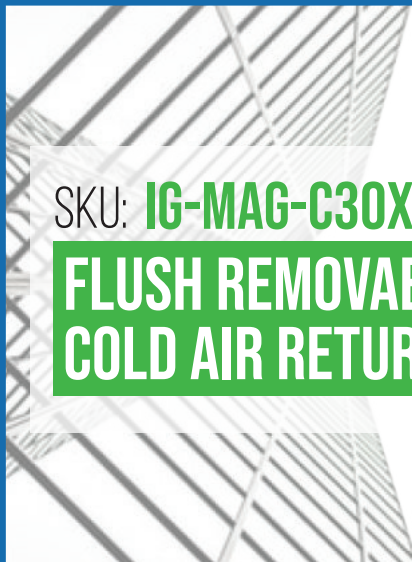

SKU: **IG-MAG-C30X14**

**FLUSH REMOVABLE
COLD AIR RETURN COVER**




DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

MATERIAL INFORMATION:

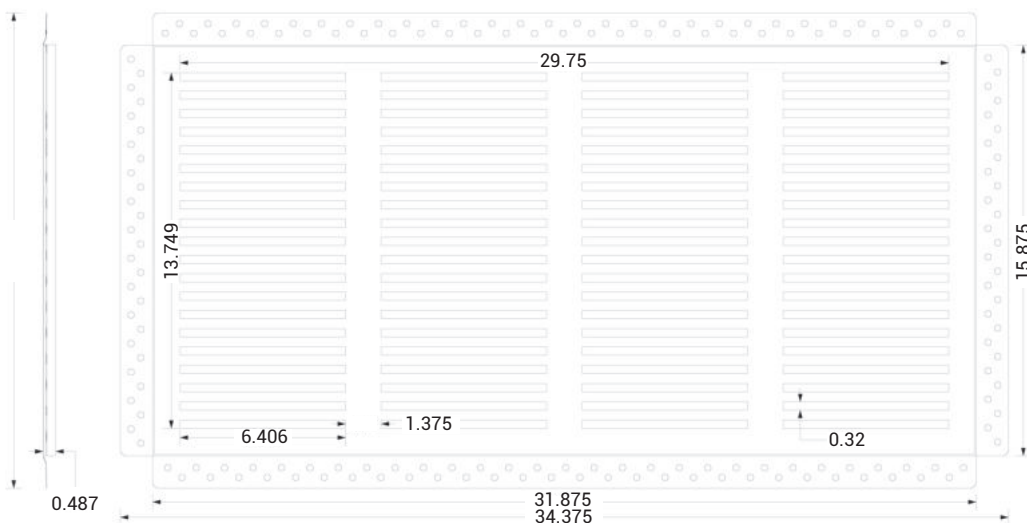

Raw Material: Cement, fibres, quartz sand, nonhazardous fillers
Density: 1.0<D ≤1.2 g/cm³
Asbestos Content: 100% asbestos-free
Fire resistance: non-combustible
Water Absorption: ≤40%
Resistant Bending Strength: ≤10.5 MPa dry
Moisture Movement: 0.25 %
Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing.



PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com