

SUBMITTAL/TECHNICAL DATA SHEET

INVISAGRILLE

DESCRIPTION

A premium flush mount access panel cover for a 14"x14" drywall opening. This cover can also be used on a wall or ceiling and yields a 12.375"x12.375" accessible area.

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.


FEATURES

- Magnetic removable triple fibre reinforced cement board cover.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.375" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 Degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

SPECIFICATIONS

- Over 153.14 square inches (988 square centimeters) of accessible area.
- Overall dimensions are 16.375" x 16.375" x 0.5" (415.9mm x 415.9mm x 12mm).
- Product weight is 3.6 pounds (1.64 kilograms)

For a complete list of options visit www.AccessDoorsAndPanels.com

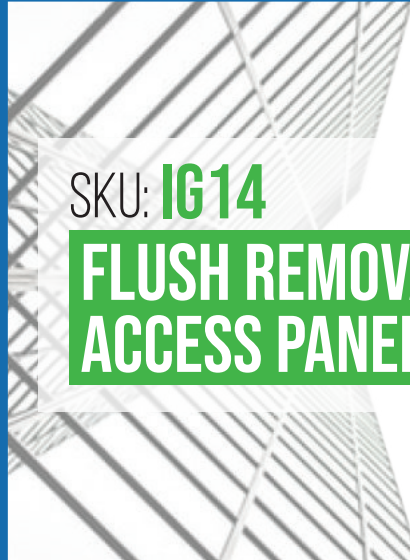



SKU: **IG14**

FLUSH REMOVABLE ACCESS PANEL



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING](#) <<

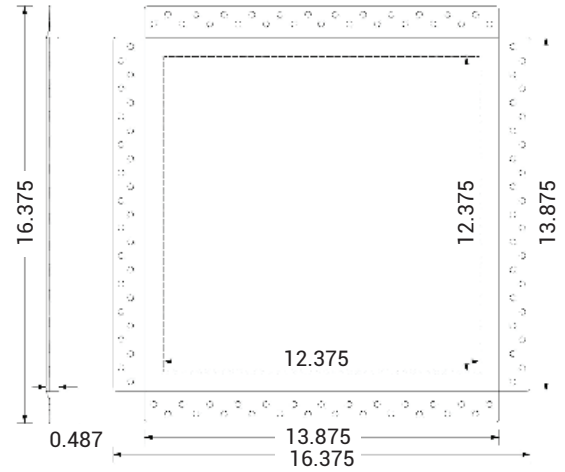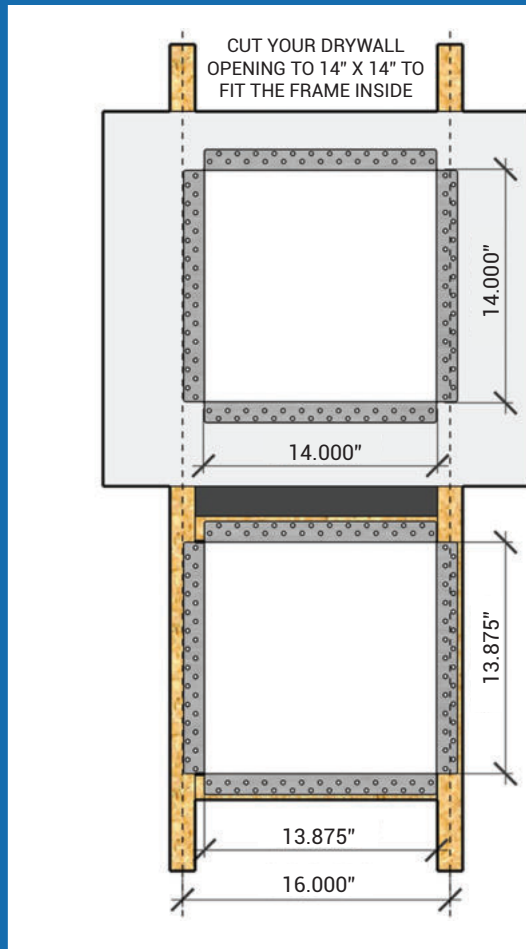



Material Information:

- Raw Material:** Cement, fibres, quartz sand, non-hazardous fillers.
- Density:** $1.0 < D \leq 1.2 \text{ g/cm}^3$
- Asbestos Content:** 100% asbestos-free
- Fire resistance:** Non-combustible edge and adjustable diffuser.
- Water Absorption:** $\leq 40\%$
- Resistant Bending Strength:** $\leq 10.5 \text{ MPa dry}$
- Moisture Movement:** 0.25 %
- Freeze Thaw:** No distortion after 25 repeated cycles of freezing and thawing .

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

TELEPHONE:
1-888-457-1275
FAX:
1-888-626-2907



PO BOX 66738 #76520,
SAINT LOUIS, MO
63166-6738
USA



WEBSITE:
www.AccessDoorsAndPanels.com
E-MAIL:
info@AccessDoorsAndPanels.com